


PSEN op4F-SL-14-114/1

631159

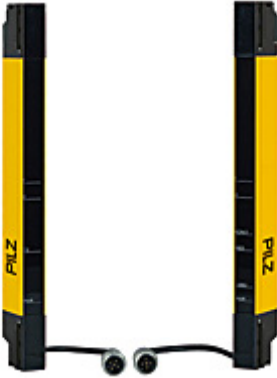

Safety light curtain, type 4 ,PL e, finger protection (resolution 14 mm)  
Protected field height 1140 mm, supply voltage 24 V, without dead zone  
Connector: M12, sender: 5-pole, receiver 5-pole Connection cable not supplied with the unit.

## Technical details

Certifications:	CE;cULus Listed;TÜV
Product version:	1.0
Height of protected field:	1140 mm
Number of beams:	114
Sensor principle:	Optical
Operating range (m):	0,2 - 6,0
Reaction time:	17.00 ms
Number of OSSD outputs:	2
Muting:	No
Supply voltage (V):	24,0
Supply voltage type:	DC
Protection type, housing:	IP65
Application in accordance with:	EN 61496-1;IEC 61496-2
Resolution of safety device:	14 mm
Width dimension:	15.4 mm
Height dimension:	1140.0 mm
Depth dimension:	32.6 mm
Gross weight:	2300 g
Net weight:	1350 g
Ambient temperature:	0 - 55 °C

## Optional accessories

	630310	PSEN op cable axial M12 5-pole 3m
	630311	PSEN op cable axial M12 5-pole 5m
	630312	PSEN op cable axial M12 5-pole 10m
	630345	PSEN op Testpiece F 14mm
	630904	PSEN op Mirror-165/1
	630298	PSEN cable M12-5sf 20m
	631183	PSEN op SL cascading 0,1m
	631180	PSEN op SL Bracket C
	631181	PSEN op SL Bracket L



631182

PSEN op SL Bracket O



631184

PSEN op SL cascading 0,5m



631185

PSEN op SL cascading 1m

---