


PMUT X1P C 24VDC 3n/o 1n/c 5so

788010

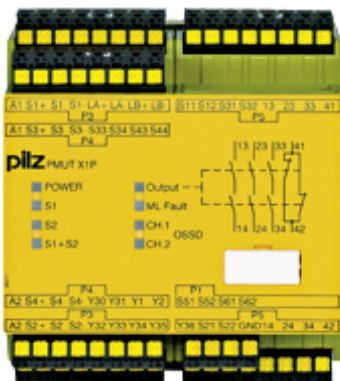

Safety relay (standalone) Inputs: 2-channel wiring with/without detection of shorts across contacts 4 muting sensors. Outputs: 3 N/O, 1 N/C, 5 semiconductor. Automatic/monitored start UB 24 V DC, width: 90 mm, plug-in spring-loaded terminals Device for the temporary suspension of safety functions, muting, monitoring of muting lamps and their automatic switching.

Technical details

| | |
|--|---|
| Certifications: | CE;cULus Listed;TÜV;CCC |
| Application options: | Instantaneous E-STOP monitoring |
| Operating modes: | Dual-channel;Manual reset;Detection of shorts across contacts;without detection of shorts across contacts |
| Product standard: | EN 61496-1 |
| Standards: | EN 60204-1;EN ISO 13849-1;VDE 0113-1 |
| Supply voltage (V): | 24,0 |
| Supply voltage type: | DC |
| Terminal style: | Plug-in |
| Terminal type: | Spring-loaded terminal |
| Number of instantaneous safety contacts: | 3 |
| Number of auxiliary contacts: | 1 |
| Number of semiconductor outputs: | 4 |
| Stop category: | 0 |
| Max. current at DC13 I (6 cycles/min): | 5.0 A |
| Voltage at AC15: | 240 V |
| Max. current at AC15: | 5.0 A |
| Width dimension: | 90.0 mm |
| Height dimension: | 101.0 mm |
| Depth dimension: | 121.0 mm |
| Gross weight: | 575 g |

| | |
|----------------------|-------------|
| Net weight: | 565 g |
| Ambient temperature: | -10 - 55 °C |

Optional accessories



374290

PNOZ X Set spring loaded terminals P1+P2



374291

PNOZ X Set spring loaded terminals P3+P4



374292

PNOZ X Set spring loaded terminals P5+P5